

# 2.00\*2.00mm(0.079"0.079")BOX HEADER,RIGHT ANGLE



REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK





## SPECIFICATIONS 规格

CURRENT RATING 电流额定值: 1.5AMP  
 CONTACT RESISTANCE 接触电阻值: 20mΩ Max  
 INSULATION RESISTANCE 绝缘电阻值: 1000MΩ Min  
 DIELECTRIC WITHSTAND 耐压值: 500V AC/minute  
 OPERATION TEMPERATURE 工作温度: -40℃to+105℃

CONTACT MATERIAL 端子材质: BRASS  
 HOUSING MATERIAL 塑胶材质:  
 STANDARD 标准物料: PA6T + 30%G.F.; UL 94V-0; BLACK  
 OPTIONS 可选物料: OR PA9T + 30%G.F.; UL 94V-0; BLACK  
 PLATING 电镀: Au or Sn Over 30u" Ni

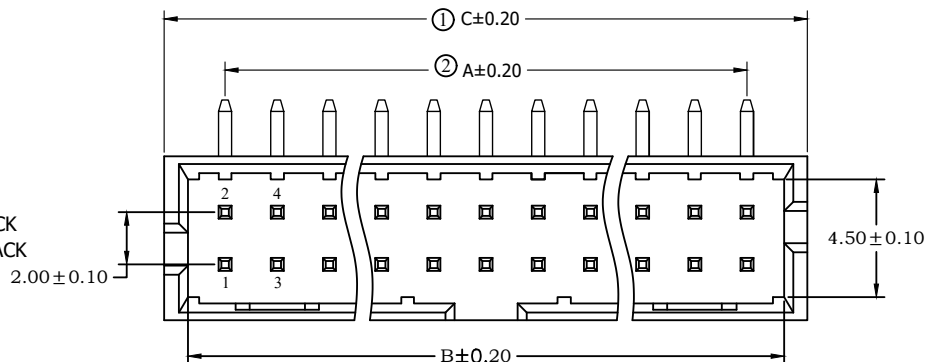

4-12P 产品两边没有窗口

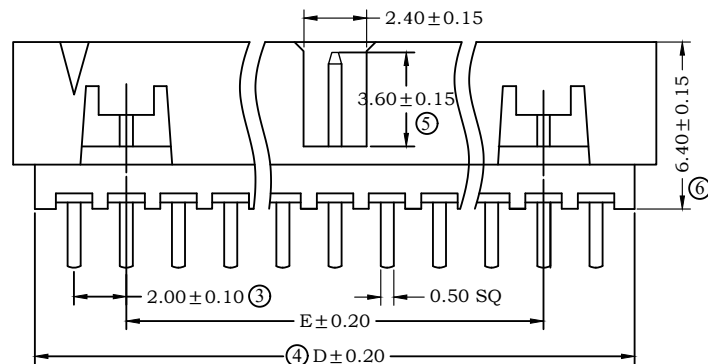


DIM PIN	A	B	C	D	E
4(2*2P)	2.00	4.85	6.65	5.00	-
6	4.00	6.85	8.65	7.00	-
8	6.00	8.85	10.65	9.00	-
10	8.00	10.85	12.65	11.00	-
12	10.00	12.85	14.65	13.00	-
14	12.00	14.85	16.65	15.00	8.00
16	14.00	16.85	18.65	17.00	10.00
18	16.00	18.85	20.65	19.00	12.00
20	18.00	20.85	22.65	21.00	14.00
22	20.00	22.85	24.65	23.00	16.00
24	22.00	24.85	26.65	25.00	18.00
26	24.00	26.85	28.65	27.00	20.00
28	26.00	28.85	30.65	29.00	22.00
30	28.00	30.85	32.65	31.00	24.00
32	30.00	32.85	34.65	33.00	26.00
34	32.00	34.85	36.65	35.00	28.00
36	34.00	36.85	38.65	37.00	30.00
38	36.00	38.85	40.65	39.00	32.00
40	38.00	40.85	42.65	41.00	34.00
42	40.00	42.85	44.65	43.00	36.00
44	42.00	44.85	46.65	45.00	38.00
46	44.00	46.85	48.65	47.00	40.00
48	46.00	48.85	50.65	49.00	42.00
50	48.00	50.85	52.65	51.00	44.00

## Ordering Information

BBR2641 - XX XX A XX B1B X

No. of Pins per Row: 02~25  
 Contact Plating: 01=Gold Flash, 04=Tin, Duplex Plating, 06=Gold Flash/Tin(100u")  
 Housing Material: B=PA6T, D=PA9T  
 Packing: A=BAG, B=TRAY, C=TUBE, D=TAPE REEL

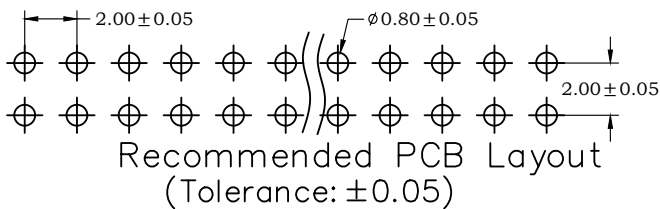

0.5\*10.0\*14.0

J&B东莞市骏佳电子科技有限公司 JunJia Electronics Technology Co.,Ltd	绘图(Drawn by)	刘应涛	投影(Third angle projection)		公差 (Tolerance)	料号 (Part No)	BBR2641-XXXXAXXP1BY	页次 (Page)	1/1
	审核(Checked by)		单位(Unit)	MM	0.0 ±0.30 0.00 ±0.20	图号 (Draw No)	BBR2641-AXXB1B		
	核准(Approved by)		比例(Scale)	1:1		品名 (Name)	MX2.00 筒牛 90度		
			版本(Version)	A					
		日期(Date)	2019.06.28						