
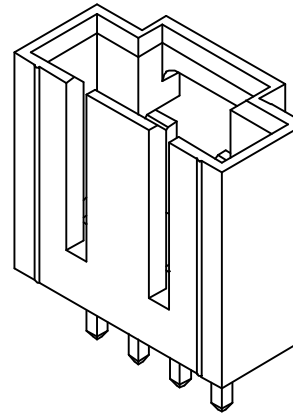


REVISION DATA			R033
ITEM	DESCRIPTION	DATE	REMARK

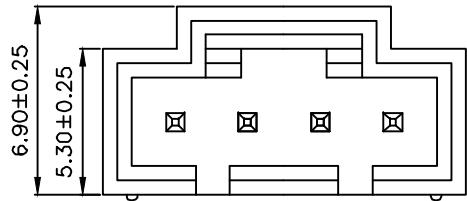

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 2A AC/DC

Withstanding Voltage: 500V AC/minute

Insulation Resistance: 1000MΩ min.




Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max

Poles: 2-20

Material: PA66, UL94V-2

Pin: Brass, Tin plated

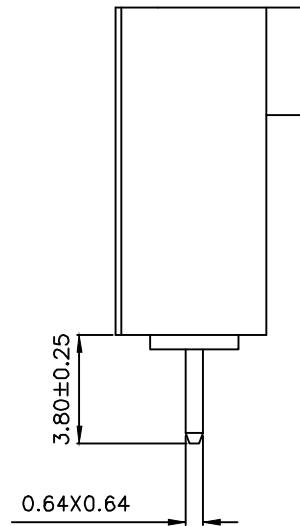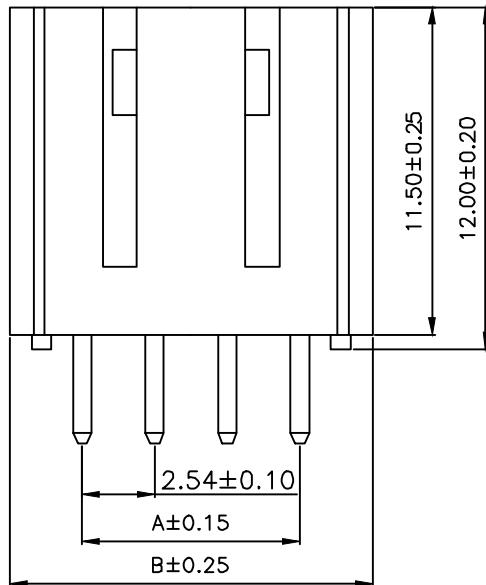

PCB LAYOUT

PART NO.	Dimensions	
	A	B
02P	2.54	7.62
03P	5.08	10.16
04P	7.62	12.70
05P	10.16	15.24
06P	12.70	17.78
07P	15.24	20.32
08P	17.78	22.86
09P	20.32	25.40
10P	22.86	27.94
11P	25.40	30.48
12P	27.94	33.02
13P	30.48	35.56
14P	33.02	38.10
15P	35.56	40.64
16P	38.10	43.18
17P	40.64	45.72
18P	43.18	48.26
19P	45.72	50.80
20P	48.26	53.34

J&B东莞市骏佳电子科技有限公司 JunJia Electronics Technology Co.,Ltd	绘图(Drawn by)	杨婷婷	投影(Third angle projection)		公差 (Tolerance)	料号 (Part No)	WAS1151-XXXXA01	页次 (Page)	1/1
	审核(Checked by)		单位(Unit)	MM	0.0 ±0.30	图号 (Draw No)			
	核准(Approved by)		比例(Scale)	1:1	0.00 ±0.20	品名 (Name)	2.54 WAFER 180度		
			版本 (Version)	A					
		日期(Date)	2015.12.21						